

User Guideline


Asymmetrical Spinnakers

For spinnaker with less than 7 -8 m foot, depends on the boat.

Updated 4. July 2020



Mounting patches

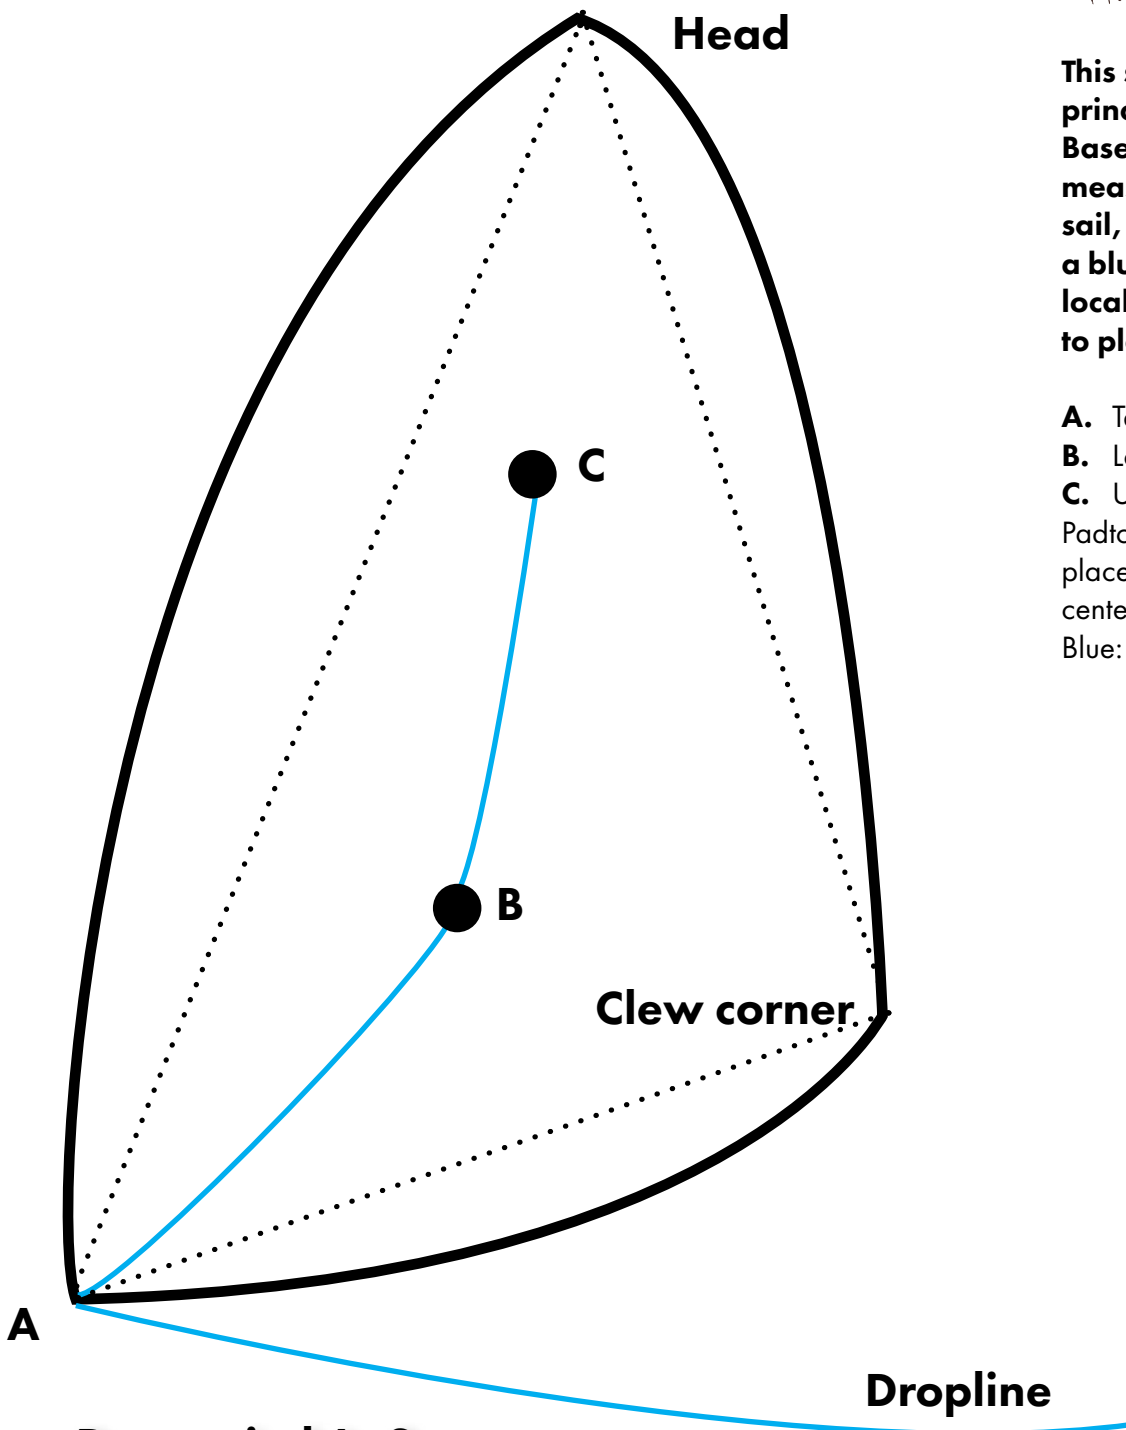

This shows the principle. Based on your measurements of your sail, we will make you a blueprint telling your local sailmaker where to place the patches.

- A. Tack corner
 - B. Lower pad
 - C. Upper pad
- Patches(B) and (C) is placed on the spinnakers centerline.
Blue: Dropline

Downwind ApS